

Ø 250 外转子轴流风机 Axial Fans








使用说明:



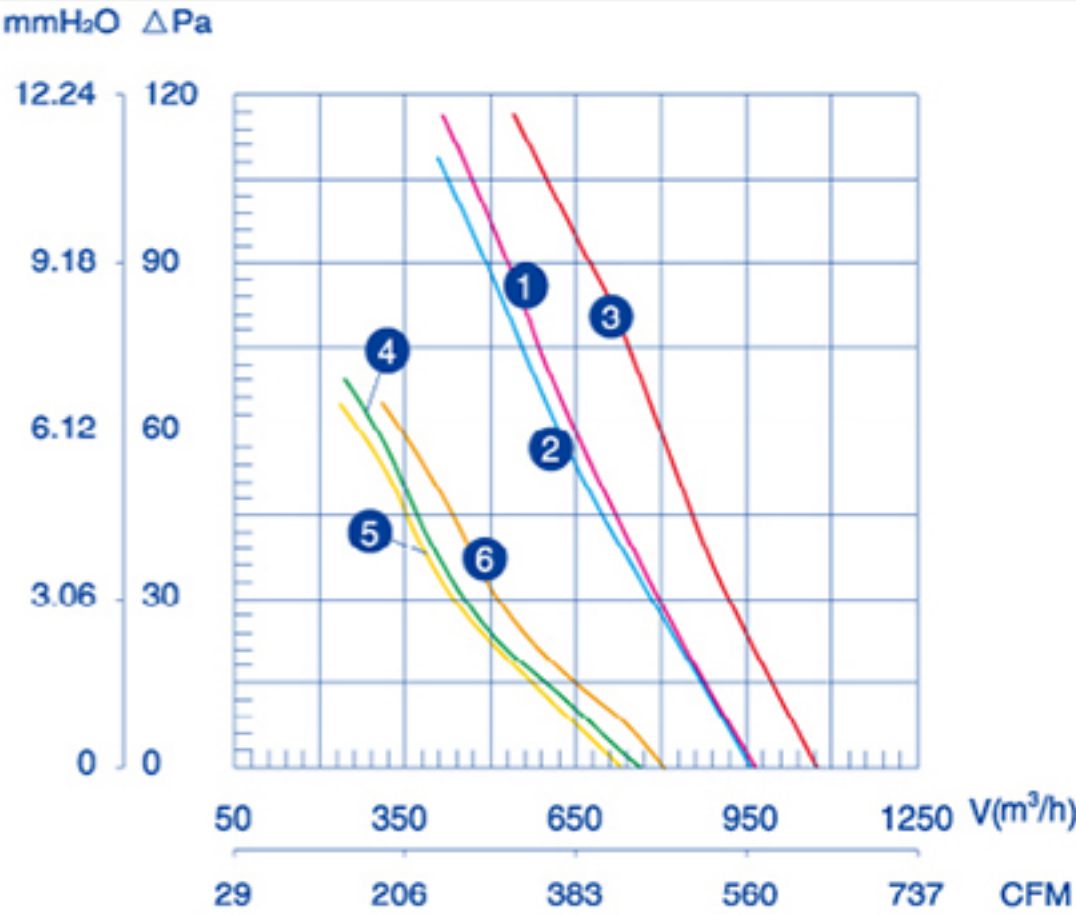



工作方式: S1
绝缘等级: B级 F级
环境温度: -30℃ ~ 60℃

应用范围:

2D-250 380V/50Hz 0~90Pa (20Pa~850m³/h)
2E-250 220V/50Hz 0~90Pa (20Pa~830m³/h)
2E-250 120V/60Hz 0~60Pa (20Pa~950m³/h)
4D-250 380V/50Hz 0~60Pa (20Pa~540m³/h)
4E-250 220V/50Hz 0~60Pa (20Pa~520m³/h)
4E-250 120V/60Hz 0~60Pa (20Pa~600m³/h)



				VCLTAGE 额定电压 V
YWF2D-250S-92/25-G	YWF2D-250S-92/25-T	YWF2D-250S-92/25-B	YWF2D-250S-92/25-R	380
YWF2E-250S-92/25-G	YWF2E-250S-92/25-T	YWF2E-250S-92/25-B	YWF2E-250S-92/25-R	220
YWF4D-250S-92/25-G	YWF4D-250S-92/25-T	YWF4D-250S-92/25-B	YWF4D-250S-92/25-R	120
YWF4E-250S-92/25-G	YWF4E-250S-92/25-T	YWF4E-250S-92/25-B	YWF4E-250S-92/25-R	380
				220
				120

FREQUENCY 频率 Hz	CURRENT 额定电流 A	INPUT 输入功率 W	SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容 μF	NOISE 噪音 dBA	NET WEIGHT 净重 kg	LICENSE 证书	NO. ON THE CURVE
50	0.22	80	2500	970	/	60	2.5		1
50	0.40	80	2400	960	3	60	2.5		2
60	0.95	120	2850	1070	10	60	2.5		3
50	0.17	60	1400	770	/	55	2.5		4
50	0.23	50	1380	730	2	55	2.5		5
60	0.55	65	1600	800	8	55	2.5		6

